

6-in 4655 | Inset

stuv

enjoyment of the fire

expanded view on the fire

precise control of the combustion

natural convection

simple installation procedure

installation box

small depth

oblique or vertical smoke flue outlet

external air inlet from below or from behind

integrated convection (no hoses or grilles)

economical

low wood consumption

high efficiency

low pollutant levels

low emission of fine particles



TECHNICAL OVERVIEW

GENERAL

TYPE OF STOVE	fitted
MATERIALS	steel + cast iron
COLOUR	Stûv Black
LOADING	manual
FUEL	wood
LOG POSITION	vertical
LOG LENGTH	20 cm

WEIGHT / SIZE

WEIGHT	60 kg
Ø OF SMOKE FLUE	130 mm
Ø OF OUTSIDE AIR INLET	100 mm

AIR

DIRECT EXTERNAL INLET	○ *
PRIMARY AIR CONTROL	✓
SECONDARY AIR CONTROL	✓
POST-COMBUSTION	✓
AIR-TIGHTNESS	++++
OPERATES WITHOUT FAN	✓
OVERHEATING INDICATOR	✓

* Below or rear intake

PERFORMANCE

NOMINAL OUTPUT	4,9 kW
OUTPUT RANGE	4 - 7 kW
EFFICIENCY	80%
CO EMISSIONS	0.08%
FINE PARTICLE EMISSIONS	15 mg/Nm³
WOOD CONSUMPTION RANGE	1.1 - 2 kg/h
MINIMUM DRAW	12 Pa
SMOKE MASS FLOW	5.4 g/s
AVERAGE TEMP. OF SMOKE	253°C
CONSUMPTION OF ROOM AIR FOR COMBUSTION	15 m³/h
ENERGY EFFICIENCY INDEX (EEI)	107
ENERGY EFFICIENCY CLASS	A+

MINIMUM THICKNESS OF INSULATION BETWEEN STOVE AND COMBUSTIBLE MATERIALS

BACK FACE	9 cm
SIDE FACE	4 cm
TOP FACE	11 cm
BOTTOM FACE	5 cm

ACCESSORIES / EQUIPMENT

FAN	X
-----	---

LEGEND

✓	STANDARD
X	UNAVAILABLE
○	OPTIONAL

Conforms with:



ECODESIGN 2022 / BE Phase 3 / DEFRA

6-in 5650 | Inset

stuv

enjoyment of the fire

expanded view on the fire

precise control of the combustion

natural convection

simple installation procedure

installation box

small depth

oblique or vertical smoke flue outlet

external air inlet from below or from behind

integrated convection (no hoses or grilles)

economical

low wood consumption

high efficiency

low pollutant levels

low emission of fine particles



TECHNICAL OVERVIEW

GENERAL

TYPE OF STOVE	fitted
MATERIALS	steel + cast iron
COLOUR	Stûv Black
LOADING	manual
FUEL	wood
LOG POSITION	vertical
LOG LENGTH	33 cm

WEIGHT / SIZE

WEIGHT	80 kg
Ø OF SMOKE FLUE	130 mm
Ø OF HOT AIR OUTLETS	150 mm
Ø OF OUTSIDE AIR INLET	100 mm

AIR

DIRECT EXTERNAL INLET	○*
PRIMARY AIR CONTROL	✓
SECONDARY AIR CONTROL	✓
POST-COMBUSTION	✓
AIR-TIGHTNESS	++++
OPERATES WITHOUT FAN	✓

* Below or rear intake

PERFORMANCE

NOMINAL OUTPUT	5,9 kW
OUTPUT RANGE	4 - 8 kW
EFFICIENCY	79%
CO EMISSIONS	0,17%
FINE PARTICLE EMISSIONS	24 mg/Nm³
NOx EMISSIONS	108 mg/Nm³
CnHm EMISSIONS	68 mg/Nm³
WOOD CONSUMPTION RANGE	1,1 - 2,3 kg/h
MINIMUM DRAW	12 Pa
SMOKE MASS FLOW	5,6 g/s
AVERAGE TEMP. OF SMOKE	257°C
CONSUMPTION OF ROOM AIR FOR COMBUSTION	15 m³/h
ENERGY EFFICIENCY INDEX (EEI)	106
ENERGY EFFICIENCY CLASS	A
ENERGY PERFORMANCE INDEX	0,47

MINIMUM THICKNESS OF INSULATION BETWEEN STOVE AND COMBUSTIBLE MATERIALS

BACK FACE	4 cm
SIDE FACE	8,5 cm
TOP FACE	10 cm
BOTTOM FACE	5 cm

ACCESSORIES / EQUIPMENT

FAN	X
-----	---

LEGEND

✓	STANDARD
X	UNAVAILABLE
○	OPTIONAL

Conforms with:



ECODESIGN 2022 / BE Phase 3 / DEFRA

6-in 6650 | Inset

stuv

enjoyment of the fire

expanded view on the fire
 precise control of the combustion
 natural or fan assisted convection

simple installation procedure

Installation box
 small depth
 oblique or vertical smoke flue outlet
 external air inlet from below or from behind
 integrated convection (Ducted convection is possible as option)

economical

low wood consumption
 high efficiency

low pollutant levels

low emission of fine particles



TECHNICAL OVERVIEW

GENERAL

TYPE OF STOVE	fitted
MATERIALS	steel + cast iron
COLOUR	Stuv Black
LOADING	manual
FUEL	wood
LOG POSITION	horizontal
LOG LENGTH	40 cm

WEIGHT / SIZE

WEIGHT	75 kg
Ø OF SMOKE FLUE	150 mm
Ø OF HOT AIR OUTLETS	150 mm
Ø OF OUTSIDE AIR INLET	100 mm

AIR

DIRECT EXTERNAL INLET	○*
PRIMARY AIR CONTROL	✓
SECONDARY AIR CONTROL	✓
POST-COMBUSTION	✓
AIR-TIGHTNESS	++++
OPERATES WITHOUT FAN	✓
OVERHEATING INDICATOR	✓

* Below or rear intake

PERFORMANCE

NOMINAL OUTPUT	7 kW
OUTPUT RANGE	5 - 9 kW
EFFICIENCY	77%
CO EMISSIONS	< 0,10%
FINE PARTICLE EMISSIONS	< 30 mg/Nm³
NOx EMISSIONS	108 mg/Nm³
CnHm EMISSIONS	68 mg/Nm³
WOOD CONSUMPTION RANGE	1,5 - 2,6 kg/h
MINIMUM DRAW	12 Pa
SMOKE MASS FLOW	5,5 g/s
AVERAGE TEMP. OF SMOKE	292°C
CONSUMPTION OF ROOM AIR FOR COMBUSTION	17 m³/h
ENERGY EFFICIENCY INDEX (EEI)	103
ENERGY EFFICIENCY CLASS	A
ENERGY PERFORMANCE INDEX	

MINIMUM THICKNESS OF INSULATION BETWEEN STOVE AND COMBUSTIBLE MATERIALS

BACK FACE	9 cm
SIDE FACE	8 cm
TOP FACE	11 cm
BOTTOM FACE	5 cm

ACCESSORIES / EQUIPMENT

FAN	○
-----	---

LEGEND

✓	STANDARD
✗	UNAVAILABLE
○	OPTIONAL

Conforms with:



ECODESIGN 2022 / BE Phase 3 / DEFRA

6-in 6655 | Inset

stuv

enjoyment of the fire

expanded view on the fire
 precise control of the combustion
 natural or fan assisted convection

simple installation procedure

Installation box
 small depth
 oblique or vertical smoke flue outlet
 external air inlet from below or from behind
 integrated convection (Ducted convection is possible as option)

economical

low wood consumption
 high efficiency

low pollutant levels

low emission of fine particles



TECHNICAL OVERVIEW

GENERAL

TYPE OF STOVE	fitted
MATERIALS	steel + cast iron
COLOUR	Stuv Black
LOADING	manual
FUEL	wood
LOG POSITION	horizontal
LOG LENGTH	40 cm

WEIGHT / SIZE

WEIGHT	95 kg
Ø OF SMOKE FLUE	150 mm
Ø OF HOT AIR OUTLETS	150 mm
Ø OF OUTSIDE AIR INLET	100 mm

AIR

DIRECT EXTERNAL INLET	○*
PRIMARY AIR CONTROL	✓
SECONDARY AIR CONTROL	✓
POST-COMBUSTION	✓
AIR-TIGHTNESS	++++
OPERATES WITHOUT FAN	✓
OVERHEATING INDICATOR	✓

* Below or rear intake

PERFORMANCE

NOMINAL OUTPUT	7,6 kW
OUTPUT RANGE	5 - 9 kW
EFFICIENCY	79%
CO EMISSIONS	0,20%
FINE PARTICLE EMISSIONS	15 mg/Nm ³
NO _x EMISSIONS	116 mg/Nm ³
CnHm EMISSIONS	68 mg/Nm ³
WOOD CONSUMPTION RANGE	1,4 - 2,6 kg/h
MINIMUM DRAW	12 Pa
SMOKE MASS FLOW	75 g/s
AVERAGE TEMP. OF SMOKE	270°C
CONSUMPTION OF ROOM AIR FOR COMBUSTION	19 m ³ /h
ENERGY EFFICIENCY INDEX (EEI)	105
ENERGY EFFICIENCY CLASS	A
ENERGY PERFORMANCE INDEX	

MINIMUM THICKNESS OF INSULATION BETWEEN STOVE AND COMBUSTIBLE MATERIALS

BACK FACE	4 cm
SIDE FACE	8,5 cm
TOP FACE	4 cm
BOTTOM FACE	8 cm

ACCESSORIES / EQUIPMENT

FAN	○
-----	---

LEGEND

✓	STANDARD
✗	UNAVAILABLE
○	OPTIONAL

Conforms with:



ECODESIGN 2012 / BE Phase 3 / DEFRA

6-in 7655 | Inset

stuv

enjoyment of the fire

expanded view on the fire
precise control of the combustion
natural or fan assisted convection

simple installation procedure

Installation box
small depth
oblique or vertical smoke flue outlet
external air inlet from below or from behind
integrated convection (Ducted convection is possible as option)

economical

low wood consumption
high efficiency

low pollutant levels

low emission of fine particles



TECHNICAL OVERVIEW

GENERAL

TYPE OF STOVE	fitted
MATERIALS	steel + cast iron
COLOUR	Stuv Black
LOADING	manual
FUEL	wood
LOG POSITION	horizontal
LOG LENGTH	50 cm

WEIGHT / SIZE

WEIGHT	85 kg
Ø OF SMOKE FLUE	153 mm
Ø OF HOT AIR OUTLETS	100 mm
Ø OF OUTSIDE AIR INLET	100 mm

AIR

DIRECT EXTERNAL INLET	○*
PRIMARY AIR CONTROL	✓
SECONDARY AIR CONTROL	✓
POST-COMBUSTION	✓
AIR-TIGHTNESS	++++
OPERATES WITHOUT FAN	✓

* Below or rear intake

PERFORMANCE

NOMINAL OUTPUT	8.5 kW
OUTPUT RANGE	6 - 10 kW
EFFICIENCY	77%
CO EMISSIONS	0,07%
FINE PARTICLE EMISSIONS	17 mg/Nm³
NOx EMISSIONS	130 mg/Nm³
CnHm EMISSIONS	52 mg/Nm³
WOOD CONSUMPTION RANGE	1,7 - 2,9 kg/h
MINIMUM DRAW	12 Pa
SMOKE MASS FLOW	8,6 g/s
AVERAGE TEMP. OF SMOKE	283°C
CONSUMPTION OF ROOM AIR FOR COMBUSTION	23 m³/h
ENERGY EFFICIENCY INDEX (EEI)	103
ENERGY EFFICIENCY CLASS	A
ENERGY PERFORMANCE INDEX	

MINIMUM THICKNESS OF INSULATION BETWEEN STOVE AND COMBUSTIBLE MATERIALS

BACK FACE	3 cm
SIDE FACE	8 cm
TOP FACE	8 cm
BOTTOM FACE	4 cm

ACCESSORIES / EQUIPMENT

FAN	○
-----	---

LEGEND

✓	STANDARD
✗	UNAVAILABLE
○	OPTIONAL

Conforms with:



ECODESIGN 2022 / BE Phase 3 / DEFRA

6-in 7660 | Inset

stuv

enjoyment of the fire

expanded view on the fire
precise control of the combustion
natural or fan assisted convection

simple installation procedure

Installation box
small depth
oblique or vertical smoke flue outlet
external air inlet from below or from behind
integrated convection (Ducted convection is possible as option)

economical

low wood consumption
high efficiency

low pollutant levels

low emission of fine particles



TECHNICAL OVERVIEW

GENERAL

TYPE OF STOVE	fitted
MATERIALS	steel + cast iron
COLOUR	Stûv Black
LOADING	manual
FUEL	wood
LOG POSITION	horizontal
LOG LENGTH	50 cm

WEIGHT / SIZE

WEIGHT	105 kg
Ø OF SMOKE FLUE	150 mm
Ø OF HOT AIR OUTLETS	150 mm
Ø OF OUTSIDE AIR INLET	100 mm

AIR

DIRECT EXTERNAL INLET	○*
PRIMARY AIR CONTROL	✓
SECONDARY AIR CONTROL	✓
POST-COMBUSTION	✓
AIR-TIGHTNESS	++++
OPERATES WITHOUT FAN	✓

* Below or rear intake

PERFORMANCE

NOMINAL OUTPUT	9,3 kW
OUTPUT RANGE	7 - 11 kW
EFFICIENCY	78%
CO EMISSIONS	0,16%
FINE PARTICLE EMISSIONS	21 mg/Nm³
NOx EMISSIONS	116 mg/Nm³
CnHm EMISSIONS	68 mg/Nm³
WOOD CONSUMPTION RANGE	2 - 3,1 kg/h
MINIMUM DRAW	12 Pa
SMOKE MASS FLOW	8,4 g/s
AVERAGE TEMP. OF SMOKE	284°C
CONSUMPTION OF ROOM AIR FOR COMBUSTION	22 m³/h
ENERGY EFFICIENCY INDEX (EEI)	105
ENERGY EFFICIENCY CLASS	A
ENERGY PERFORMANCE INDEX	

MINIMUM THICKNESS OF INSULATION BETWEEN STOVE AND COMBUSTIBLE MATERIALS

BACK FACE	4 cm
SIDE FACE	8 cm
TOP FACE	4 cm
BOTTOM FACE	8 cm

ACCESSORIES / EQUIPMENT

FAN	○
-----	---

LEGEND

✓	STANDARD
✗	UNAVAILABLE
○	OPTIONAL

Conforms with:



ECODESIGN 2022 / BE Phase 3 / DEFRA

6-in 8660 | Inset

stuv

enjoyment of the fire

expanded view on the fire
 precise control of the combustion
 natural or fan assisted convection

simple installation procedure

Installation box
 small depth
 oblique or vertical smoke flue outlet
 external air inlet from below or from behind
 integrated convection (Ducted convection is possible as option)

economical

low wood consumption
 high efficiency

low pollutant levels

low emission of fine particles



TECHNICAL OVERVIEW

GENERAL

TYPE OF STOVE	fitted
MATERIALS	steel + cast iron
COLOUR	Stuv Black
LOADING	manual
FUEL	wood
LOG POSITION	horizontal
LOG LENGTH	50 cm

WEIGHT / SIZE

WEIGHT	95 kg
Ø OF SMOKE FLUE	180 mm
Ø OF HOT AIR OUTLETS	150 mm
Ø OF OUTSIDE AIR INLET	100 mm

AIR

DIRECT EXTERNAL INLET	○*
PRIMARY AIR CONTROL	✓
SECONDARY AIR CONTROL	✓
POST-COMBUSTION	✓
AIR-TIGHTNESS	++++
OPERATES WITHOUT FAN	✓

* Below or rear intake

PERFORMANCE

NOMINAL OUTPUT	10,8 kW
OUTPUT RANGE	8 - 13 kW
EFFICIENCY	75 %
CO EMISSIONS	0,08 %
FINE PARTICLE EMISSIONS	22 mg/Nm ³
NO _x EMISSIONS	113 mg/Nm ³
CnHm EMISSIONS	85 mg/Nm ³
WOOD CONSUMPTION RANGE	2,4 - 3,9 kg/h
MINIMUM DRAW	12 Pa
SMOKE MASS FLOW	10,7 g/s
AVERAGE TEMP. OF SMOKE	312°C
CONSUMPTION OF ROOM AIR FOR COMBUSTION	23 m ³ /h
ENERGY EFFICIENCY INDEX (EEI)	103
ENERGY EFFICIENCY CLASS	A
ENERGY PERFORMANCE INDEX	

MINIMUM THICKNESS OF INSULATION BETWEEN STOVE AND COMBUSTIBLE MATERIALS

BACK FACE	4 cm
SIDE FACE	8 cm
TOP FACE	4 cm
BOTTOM FACE	8 cm

ACCESSORIES / EQUIPMENT

FAN	○
-----	---

LEGEND

✓	STANDARD
✗	UNAVAILABLE
○	OPTIONAL

Conforms with:




ECODESIGN 2022 / BE Phase 3 / DEFRA

Stûv 6-in | Inset

stûv

STANDARD AND OPTIONAL ELEMENTS

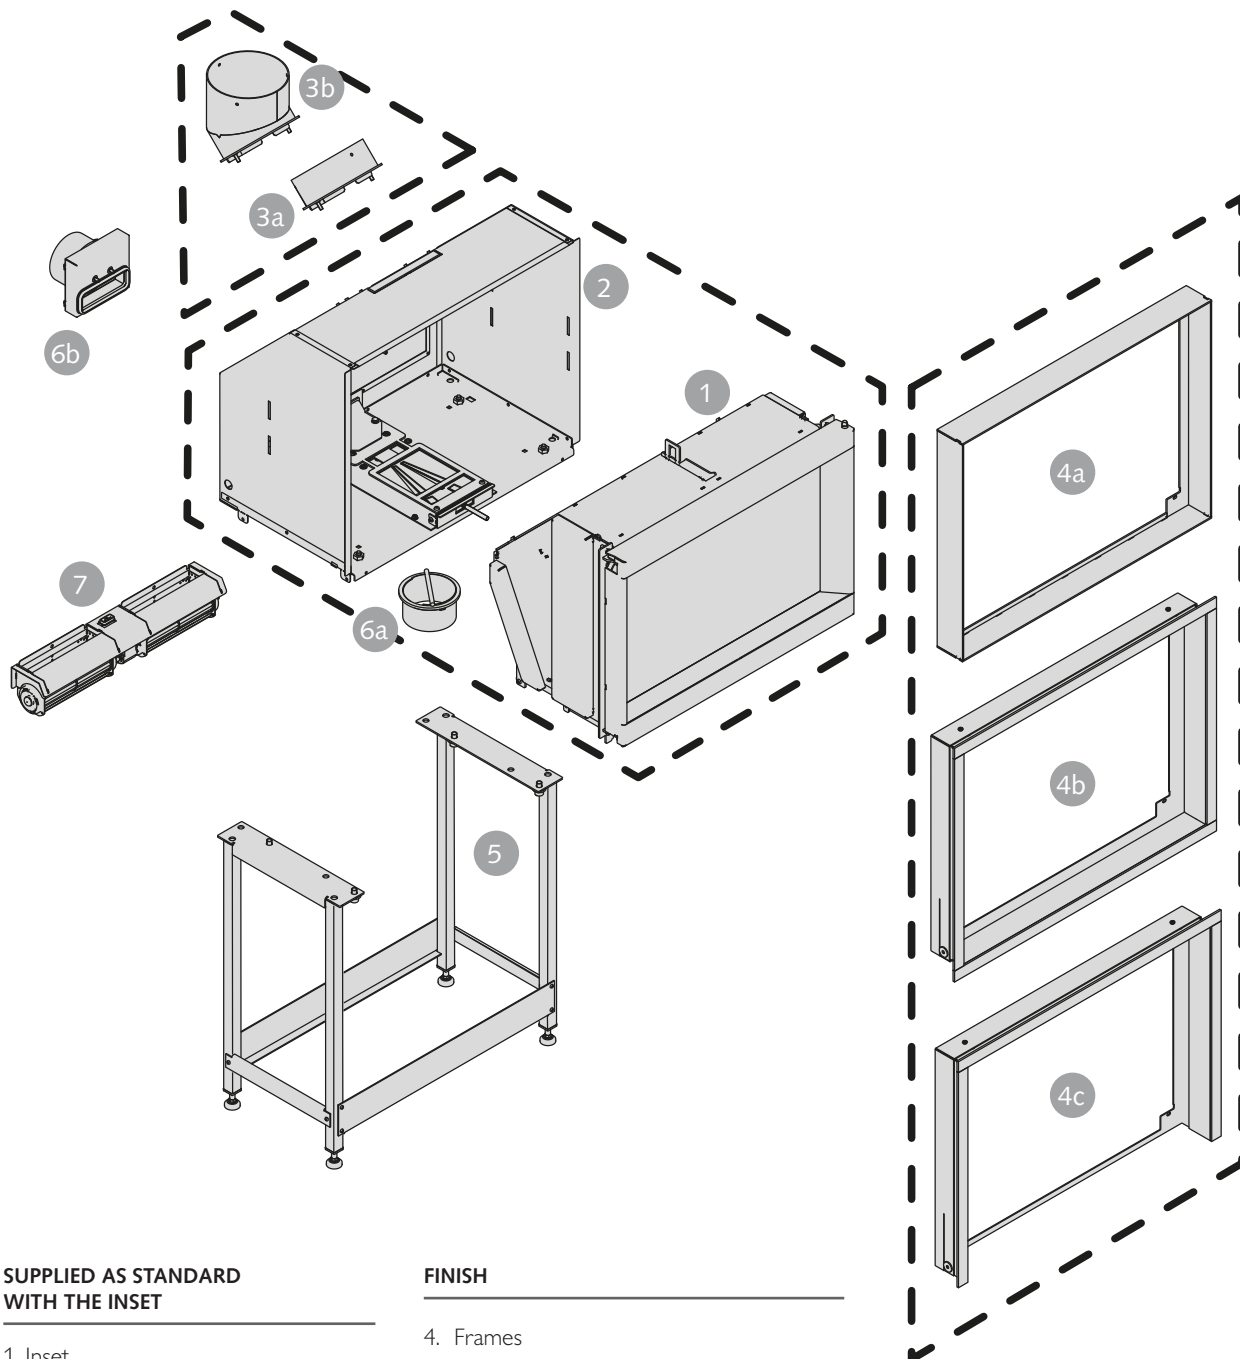

SUPPLIED AS STANDARD WITH THE INSET

1. Inset
2. Installation box

FINISH

4. Frames
- 4a. Thin frame
- 4b. Fitted frame four sided
- 4c. Fitted frame three sided

SMOKE PIPE CONNECTION

3. Smoke outlets
- 3a. Oblique smoke outlet
- 3b. Vertical smoke outlet


OPTIONAL

5. Support table
6. Air connection
- 6a. Air connection kit 100 mm below
- 6b. Air connection kit 100 mm rear
7. Fan

Stûv 6-in 4655 | Inset

stûv

APPLIANCE DIMENSIONS

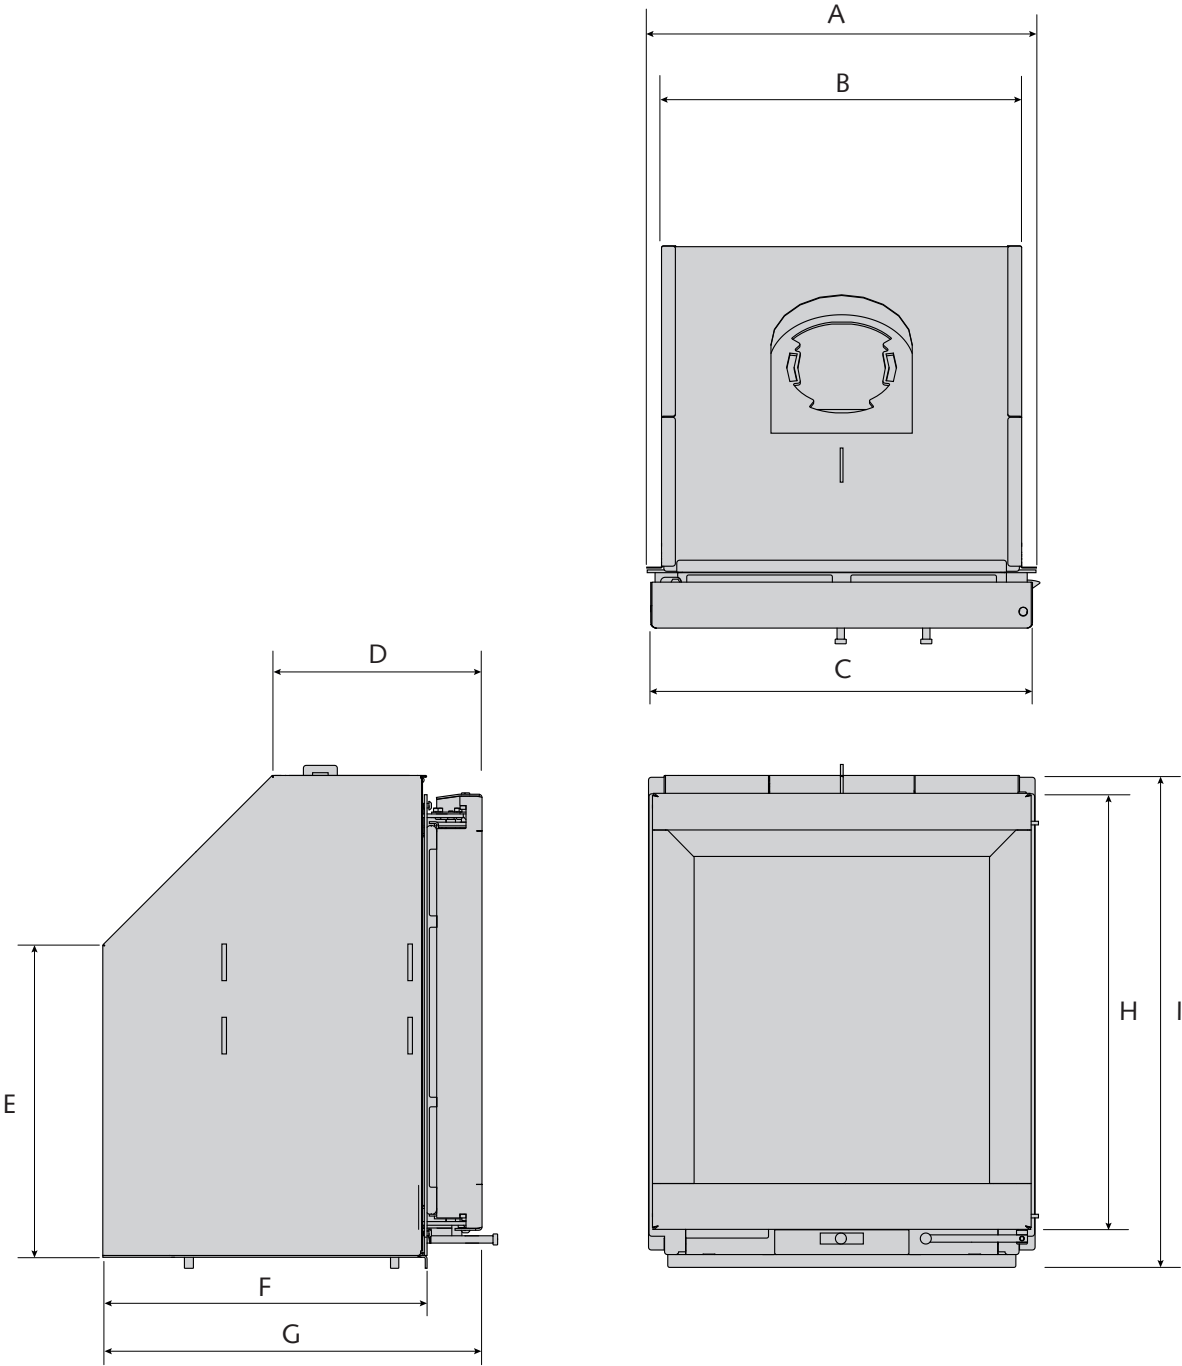


DIMENSIONS (MM)	A	B	C	D	E	F	G	H	I
Stûv 6-in 4655	422	390	413	228	340	353	413	476	538

Stûv 6-in 4655 | Inset

stûv


APPLIANCE DIMENSIONS

OBLIQUE SMOKE OUTLET

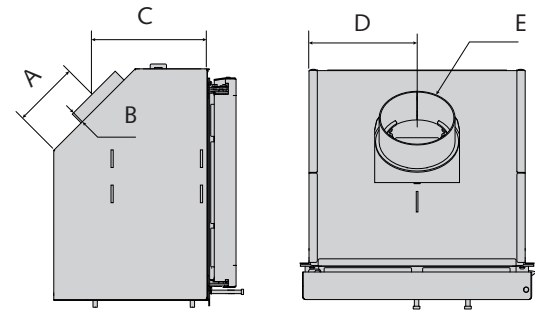


DIMENSIONS (MM)	A	B	C	D	E
Stûv 6-in 4655	149	29	262	195	130

VERTICAL SMOKE OUTLET

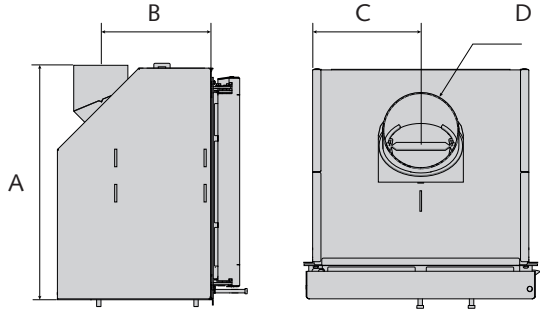


DIMENSIONS (MM)	A	B	C	D
Stûv 6-in 4655	544	251	195	130

AIR CONNECTION KIT 100MM BELOW (OPTION)

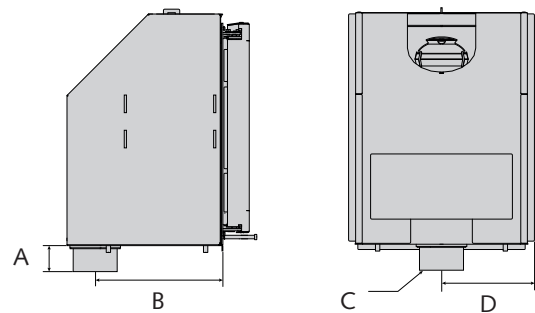

DIMENSIONS (MM)	A	B	C	D
Stûv 6-in 4655	59	290	100	195

AIR CONNECTION KIT 100MM REAR (OPTION)

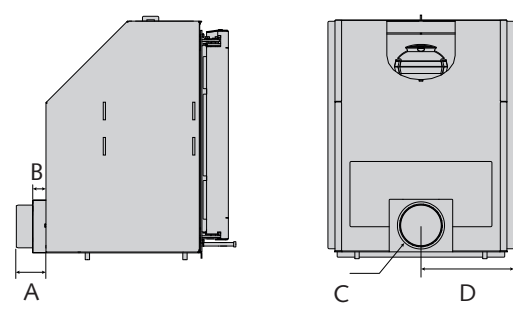


DIMENSIONS (MM)	A	B	C	D
Stûv 6-in 4655	92	31	100	295

Stûv 6-in | Inset

stûv

APPLIANCE DIMENSIONS

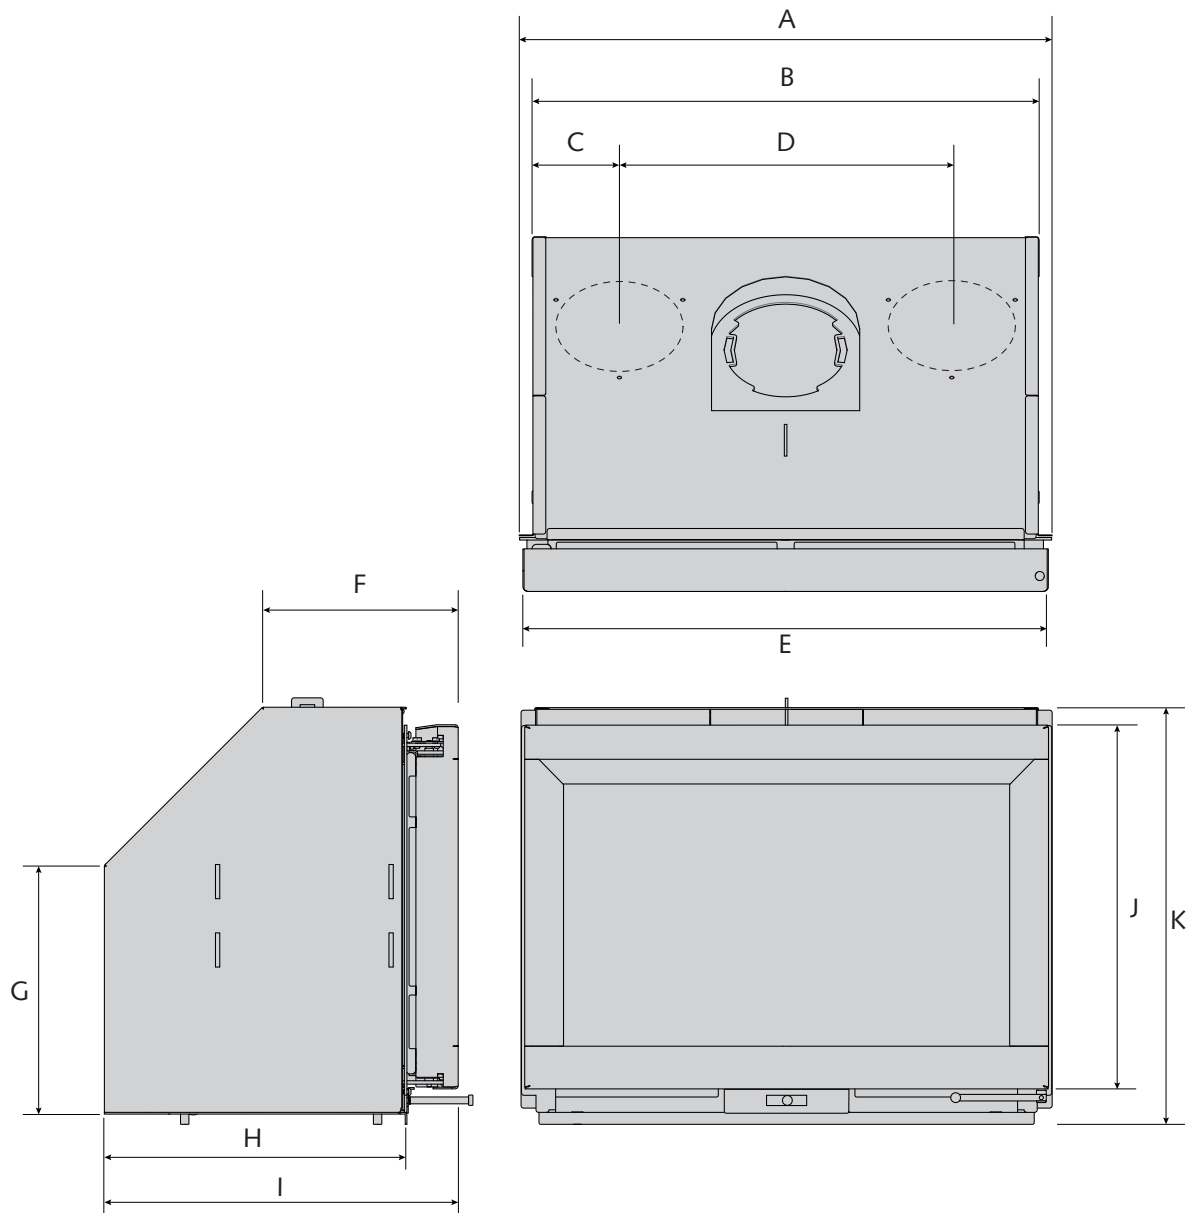


DIMENSIONS (MM)	A	B	C	D	E	F	G	H	I	J	K
Stûv 6-in 5650	522	490	-	-	513	228	290	353	413	426	488
Stûv 6-in 6650	622	590	101	388	613	228	290	353	413	426	488
Stûv 6-in 6655	622	590	101	388	613	228	340	353	413	476	538
Stûv 6-in 7655	722	690	101	488	713	228	340	353	413	476	538
Stûv 6-in 7660	722	690	101	488	713	228	390	353	413	526	588
Stûv 6-in 8660	822	790	141	508	813	228	390	353	413	526	588

Stûv 6-in | Inset

stûv


APPLIANCE DIMENSIONS

OBLIQUE SMOKE OUTLET

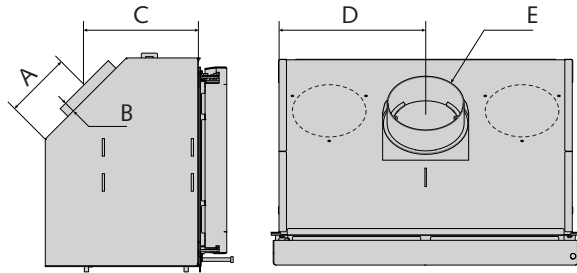


DIMENSIONS (MM)	A	B	C	D	E
Stûv 6-in 5650	149	29	262	245	130
Stûv 6-in 6650	149	29	262	295	150
Stûv 6-in 6655	149	29	262	295	150
Stûv 6-in 7655	149	29	262	345	150
Stûv 6-in 7660	149	29	262	345	150
Stûv 6-in 8660	149	29	262	395	180

VERTICAL SMOKE OUTLET

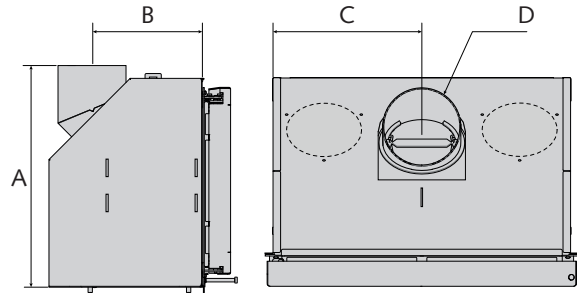


DIMENSIONS (MM)	A	B	C	D
Stûv 6-in 5650	478	251	245	130
Stûv 6-in 6650	478	251	295	150
Stûv 6-in 6655	555	251	295	150
Stûv 6-in 7655	555	251	345	150
Stûv 6-in 7660	605	251	345	150
Stûv 6-in 8660	605	251	395	180

AIR CONNECTION KIT 100MM BELOW (OPTION)

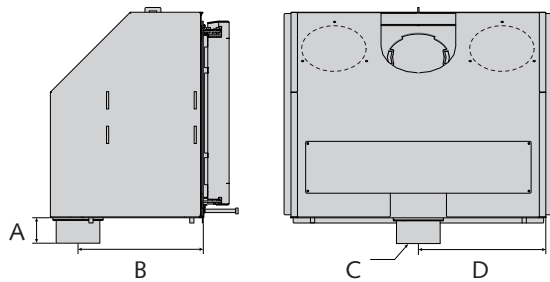

DIMENSIONS (MM)	A	B	C	D
Stûv 6-in 5650	59	290	100	245
Stûv 6-in 6650	59	290	100	295
Stûv 6-in 6655	59	290	100	295
Stûv 6-in 7655	59	290	100	345
Stûv 6-in 7660	59	290	100	345
Stûv 6-in 8660	59	290	100	395

AIR CONNECTION KIT 100MM REAR (OPTION)

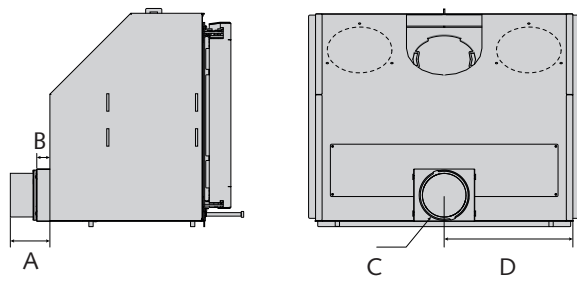


DIMENSIONS (MM)	A	B	C	D
Stûv 6-in 5650	70	31	100	245
Stûv 6-in 6650	70	31	100	295
Stûv 6-in 6655	70	31	100	295
Stûv 6-in 7655	70	31	100	345
Stûv 6-in 7660	70	31	100	345
Stûv 6-in 8660	70	31	100	395

Stûv 6-in | Inset





APPLIANCE DIMENSIONS

SUPPORT TABLE

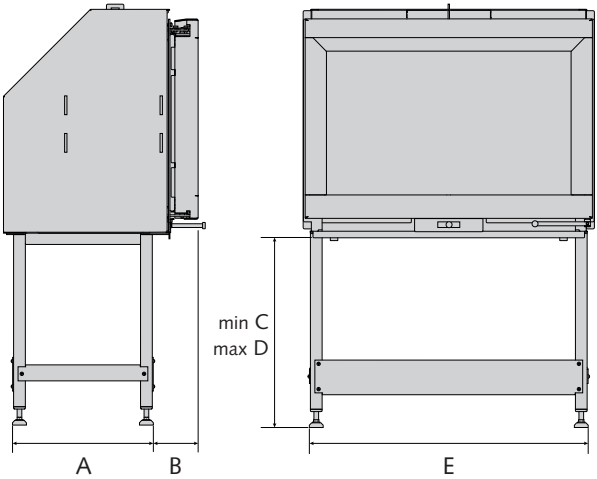


DIMENSIONS (MM)	A	B	C	D	E
Stûv 6-in 4655	300	95	50	600	496
Stûv 6-in 5650	300	95	50	600	496
Stûv 6-in 6650	300	95	50	600	596
Stûv 6-in 6655	300	95	50	600	596
Stûv 6-in 7655	300	95	50	600	696
Stûv 6-in 7660	300	95	50	600	696
Stûv 6-in 8660	300	95	50	600	796

Stûv 6-in | Fitted frame three sided

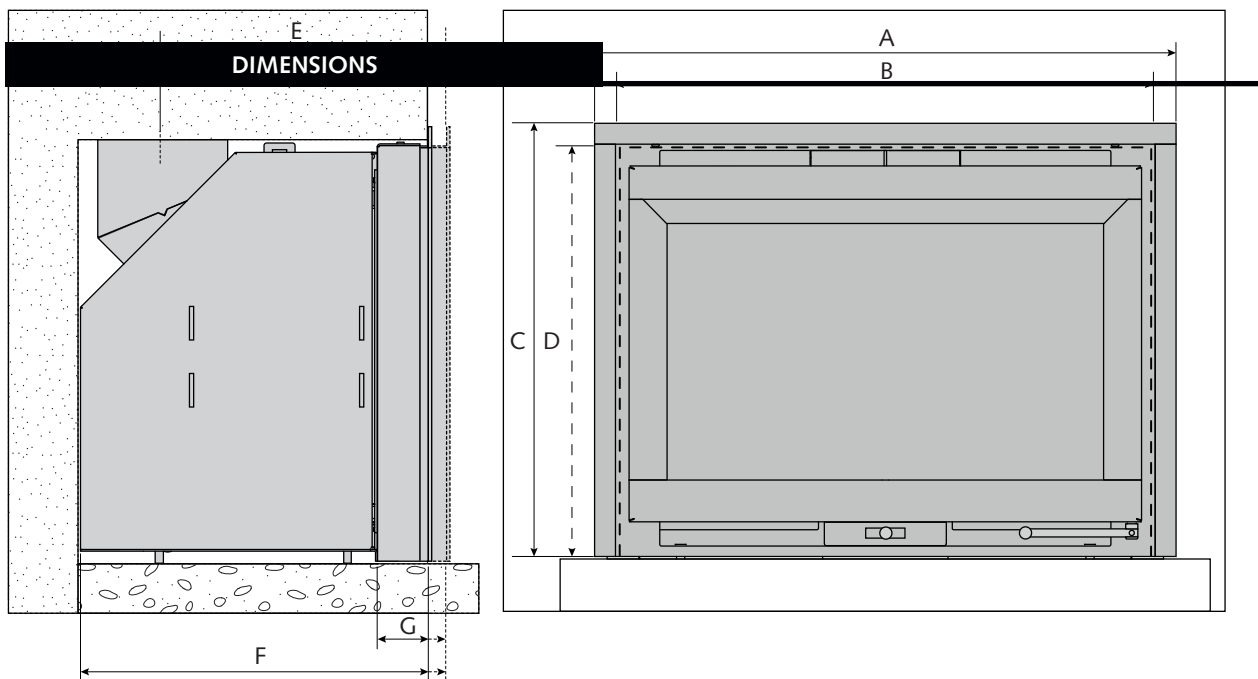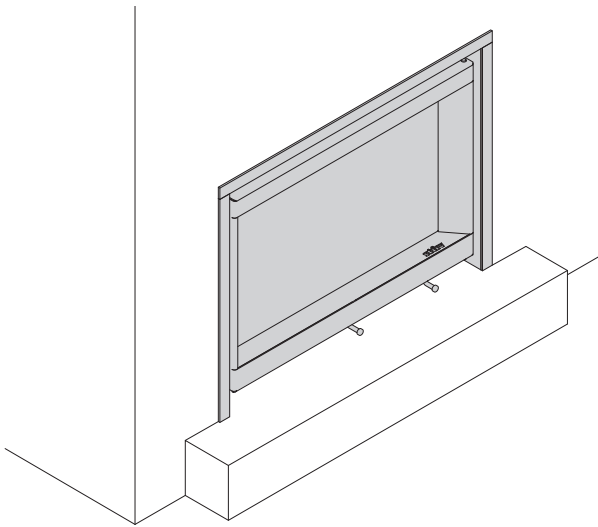


DIMENSIONS (MM)	A	B	C	D	E	F	G
Stûv 6-in 4655	496	460	567	545	316 (-0/+20)	413 (-0/+20)	60 (-0/+20)
Stûv 6-in 5650	596	560	519	495	316 (-0/+20)	413 (-0/+20)	60 (-0/+20)
Stûv 6-in 6650	696	660	519	495	316 (-0/+20)	413 (-0/+20)	60 (-0/+20)
Stûv 6-in 6655	696	660	567	545	316 (-0/+20)	413 (-0/+20)	60 (-0/+20)
Stûv 6-in 7655	796	760	567	545	316 (-0/+20)	413 (-0/+20)	60 (-0/+20)
Stûv 6-in 7660	796	760	619	595	316 (-0/+20)	413 (-0/+20)	60 (-0/+20)
Stûv 6-in 8660	896	860	619	595	316 (-0/+20)	413 (-0/+20)	60 (-0/+20)

Stûv 6-in | Fitted frame four sided

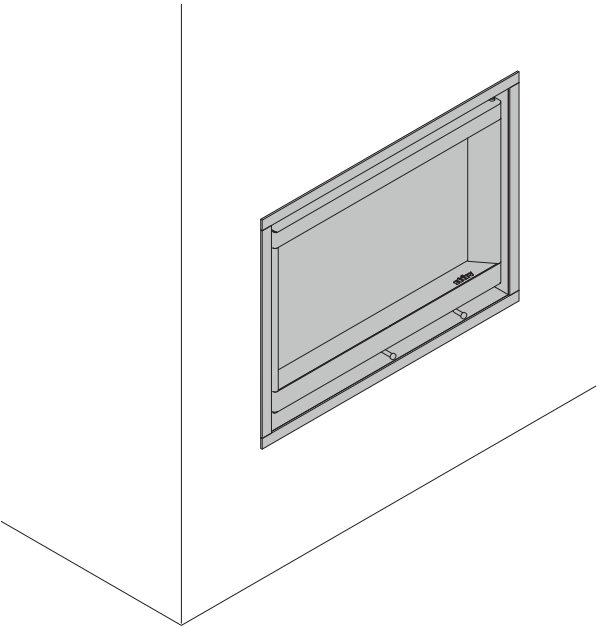



DIMENSIONS

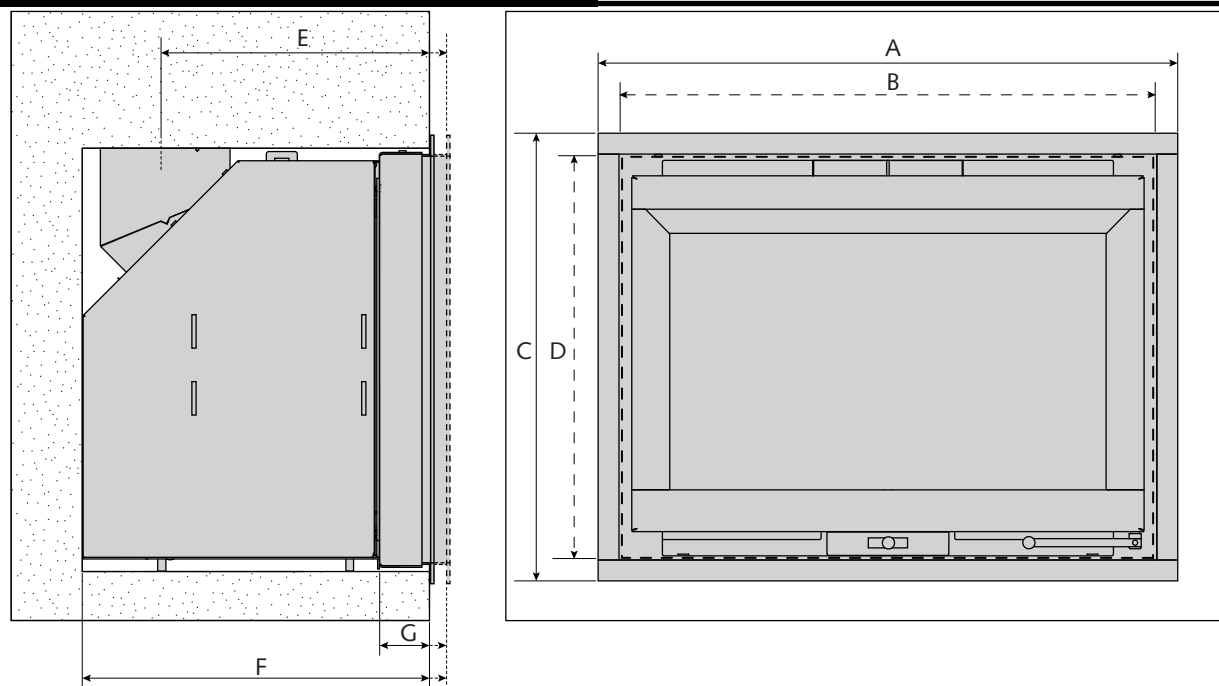

DIMENSIONS (MM)	A	B	C	D	E	F	G
Stûv 6-in 4655	494	460	586	550	316 (-0/+20)	413 (-0/+20)	60 (-0/+20)
Stûv 6-in 5650	594	560	536	500	316 (-0/+20)	413 (-0/+20)	60 (-0/+20)
Stûv 6-in 6650	694	660	536	500	316 (-0/+20)	413 (-0/+20)	60 (-0/+20)
Stûv 6-in 6655	694	660	586	550	316 (-0/+20)	413 (-0/+20)	60 (-0/+20)
Stûv 6-in 7655	794	760	586	550	316 (-0/+20)	413 (-0/+20)	60 (-0/+20)
Stûv 6-in 7660	794	760	636	600	316 (-0/+20)	413 (-0/+20)	60 (-0/+20)
Stûv 6-in 8660	894	860	636	600	316 (-0/+20)	413 (-0/+20)	60 (-0/+20)

Stûv 6-in | Thin frame (recessed)

stûv

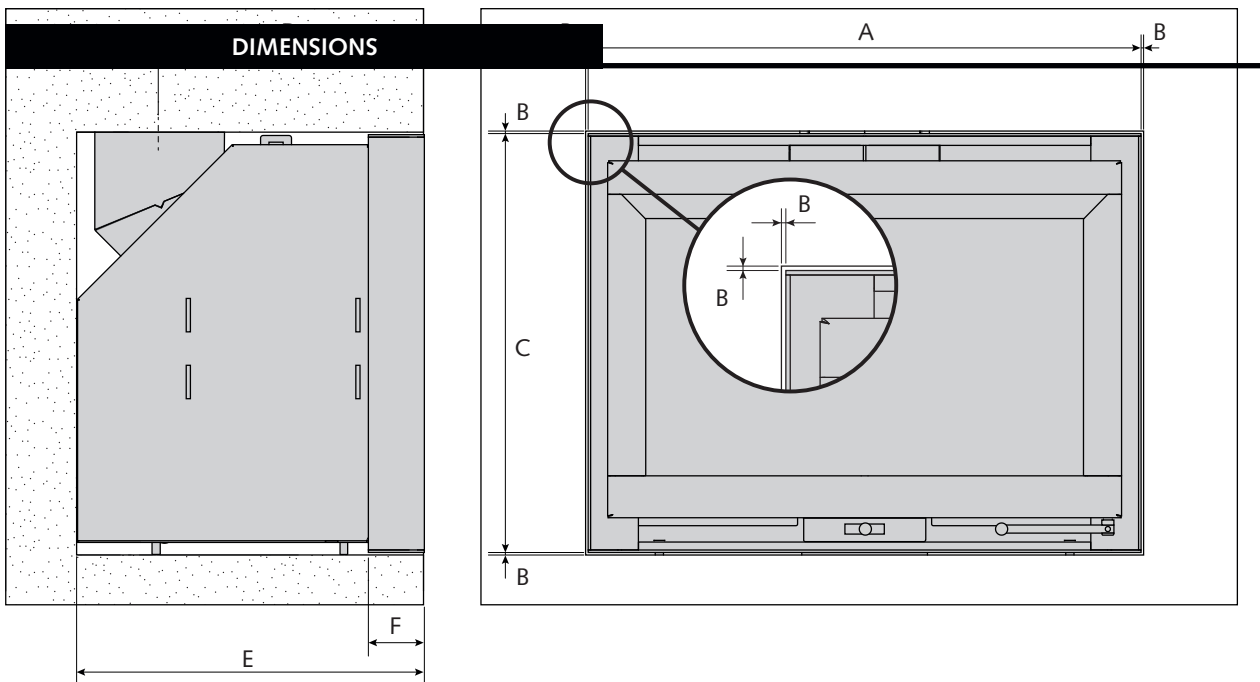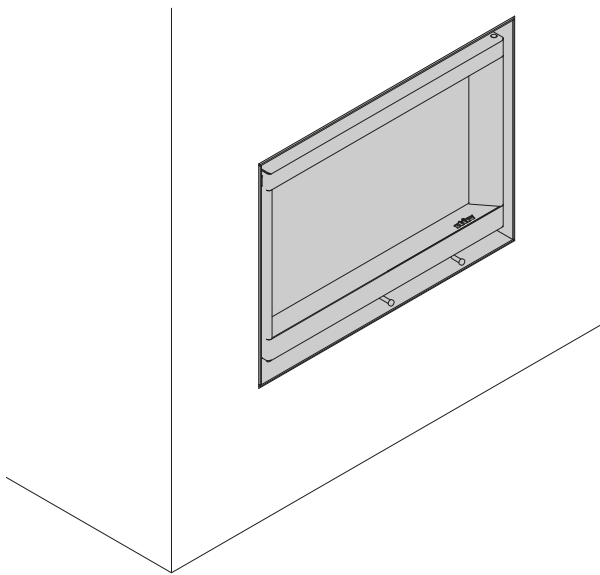


DIMENSIONS (MM)	A	B*	C	D	E	F
Stûv 6-in 4655	460	4	550	317	415	67
Stûv 6-in 5650	560	4	500	317	415	67
Stûv 6-in 6650	660	4	500	317	415	67
Stûv 6-in 6655	660	4	550	317	415	67
Stûv 6-in 7655	760	4	550	317	415	67
Stûv 6-in 7660	760	4	600	317	415	67
Stûv 6-in 8660	860	4	600	317	415	67



* Hollow seal to be respected around the finishing frame

Stûv 6-in | Thin frame

stûv

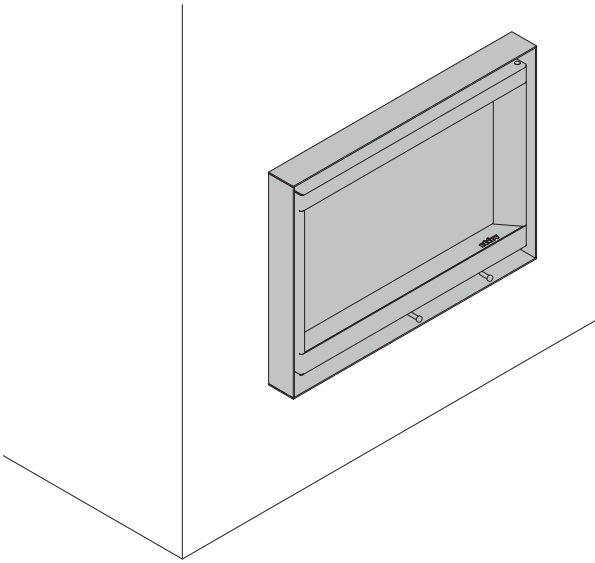

DIMENSIONS

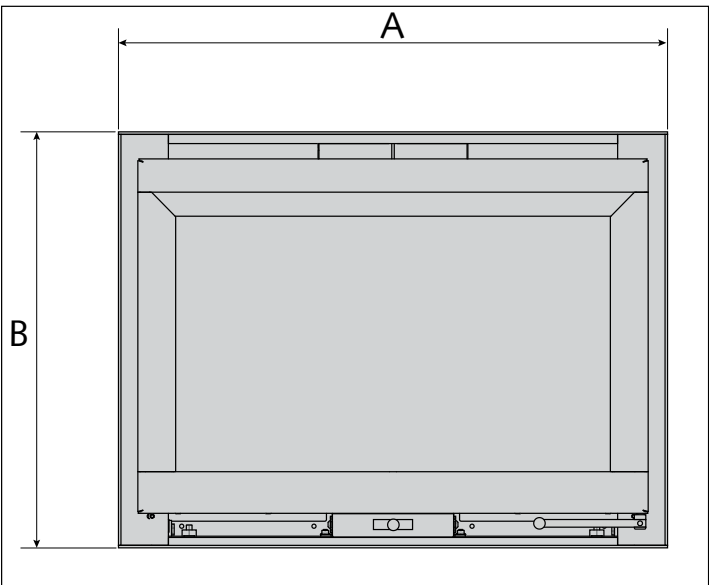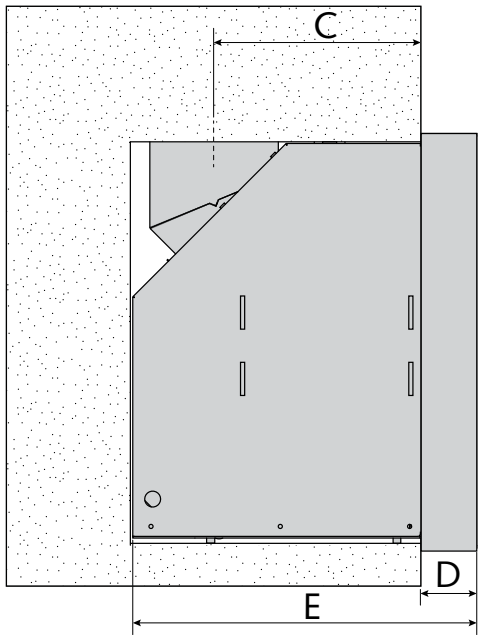

DIMENSIONS (MM)	A	B	C	D	E
Stûv 6-in 4655	460	550	250	67	415
Stûv 6-in 5650	560	500	250	67	415
Stûv 6-in 6650	660	500	250	67	415
Stûv 6-in 6655	660	550	250	67	415
Stûv 6-in 7655	760	550	250	67	415
Stûv 6-in 7660	760	60	250	67	415
Stûv 6-in 8660	860	600	250	67	415